



**QINGDAO MYHWAY INTERNATIONAL TRADE CO LTD**

ADD: NO.39 SHILING ROAD, QINGDAO CITY, SHANDONG, CHINA

Email: rambo@myhway.com

Mob: 0086-15069105211

Web: www.myhway.com



# GODDARD TIRE PRODUCT MANUAL



# PRODUCT CATALOG



GODDARD

TRANSFORCE 300	02
TRANSFORCE 100	03
TRANSFORCE 768	05
TRANSFORCE 168	07
TRANSFORCE 568	08
CRADec GC688	09
LIBERUD GL267	10
LIBERUD GL268	10


## TRANSFORCE 300

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WINTH (mm)	OVERALL DIAMETER (mm)	TREAD DEPTH (MM)	MAXLOAD KG LBS	MAX PRESSURE Kpa Psi
215/45ZR17	91XL	W	7J	213	626	8	750/1653	340/50
215/45ZR18	93XL	W	7J	213	651	8	825/1819	340/50
215/50ZR17	95XL	W	7J	226	648	8	580/1279	340/50
215/55R16	97XL	V	7J	226	642	7.2	750/1653	340/50
215/55ZR17	98XL	W	7J	226	668	8	650/1433	340/50
215/60R16	95	H	6½J	221	664	7.2	500/1102	340/50
215/65R16	98	H	6½J	221	686	8	615/1356	340/50
225/40ZR18	92XL	W	8J	230	637	8	650/1433	340/50
225/45ZR17	94XL	W	7½J	225	634	8	750/1653	340/50
225/45ZR18	95XL	W	7½J	225	659	8	875/1929	340/50
225/50ZR17	98XL	W	7J	233	658	8	800/1764	340/50
225/55R16	95	V	7J	233	654	7.2	670/1477	340/50
225/55ZR17	101XL	W	7J	233	680	8	560/1235	340/50
225/60R16	98	V	6½J	228	676	7.2	730/1609	340/50
235/40ZR18	95XL	W	8½J	241	645	7.8	775/1709	340/50
235/45ZR17	97XL	W	8J	236	644	8	690/1521	340/50
235/45ZR18	98XL	W	8J	236	669	8	800/1764	340/50
235/50ZR17	100XL	W	7½J	245	668	8	630/1389	340/50
235/55ZR17	103XL	W	7½J	245	690	8	690/1521	340/50
245/40ZR18	97XL	W	8½J	248	653	7.2	730/1609	340/50
245/45ZR17	99XL	W	8J	243	652	7.2	690/1521	340/50
245/45ZR18	100XL	W	8J	243	677	7.2	545/1200	340/50



# TRANSFORCE 100

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WINTH (mm)	OVERALL DIAMETER (mm)	TREAD DEPTH (MM)	MAXLOAD KG LBS	MAX PRESSURE Kpa Psi
155/65R13	73	T	4.50B	157	532	7.2	560/1235	300/44
155/70R13	75	T	4.50B	157	548	7.2	615/1356	300/44
165/60R14	75	T	5J	170	554	7.2	690/1521	300/44
165/65R13	77	T	5.00B	170	544	7.2	615/1356	300/44
165/70R13	79	T	5.00B	170	562	7.2	560/1235	300/44
165/70R14	81	T	5.00B	170	588	7.2	500/1102	300/44
175/60R13	77	H	5.00B	177	540	7.2	437/963	300/44
175/65R14	82	H	5J	177	584	7.5	670/1477	300/44
175/70R13	82	T	5.00B	177	576	7.5	500/1102	300/44
175/70R14	84	H	5.00B	177	602	7.2	475/1047	300/44
185/55R15	82	V	6J	194	585	7.2	530/1168	300/44
185/60R14	82	H	5 1/2J	189	578	7.2	630/1389	300/44
185/60R15	84	H	5 1/2J	189	603	7.2	750/1653	300/44
185/65R14	86	H	5 1/2J	189	596	7.2	475/1047	300/44
185/65R15	88	T	5 1/2J	189	621	7.2	530/1168	300/44
185/70R14	88	H	5 1/2J	189	616	7.2	387/853	300/44
195/50R15	82	H	6J	201	577	8	412/908	300/44
195/55R15	85	V	6J	201	595	7.2	475/1047	300/44
195/55R16	87	V	6J	201	620	7.2	462/1019	300/44
195/60R14	86	H	6J	201	590	7.2	475/1047	300/44
195/60R15	88	V	6J	201	615	7.2	475/1047	300/44
195/60R16	89	H	6J	201	640	7.2	412/908	300/44
195/65R15	91	V	6J	201	635	7.2	387/853	300/44
195/70R14	91	H	6J	201	630	8	615/1356	300/44
205/40ZR17	84XL	W	7 1/2J	212	596	8	365/805	300/44
205/45ZR17	88XL	W	7J	206	616	8	560/1235	300/44
205/50ZR17	93XL	W	6 1/2J	214	638	8	515/1135	300/44
205/55R16	91	V	6 1/2J	214	632	7.2	730/1609	300/44
205/60R16	92	H	6J	209	652	8	690/1521	300/44
205/65R15	94	V	6J	209	647	7.2	580/1279	300/44
215/40ZR18	89XL	W	7 1/2J	218	629	8	750/1653	300/44

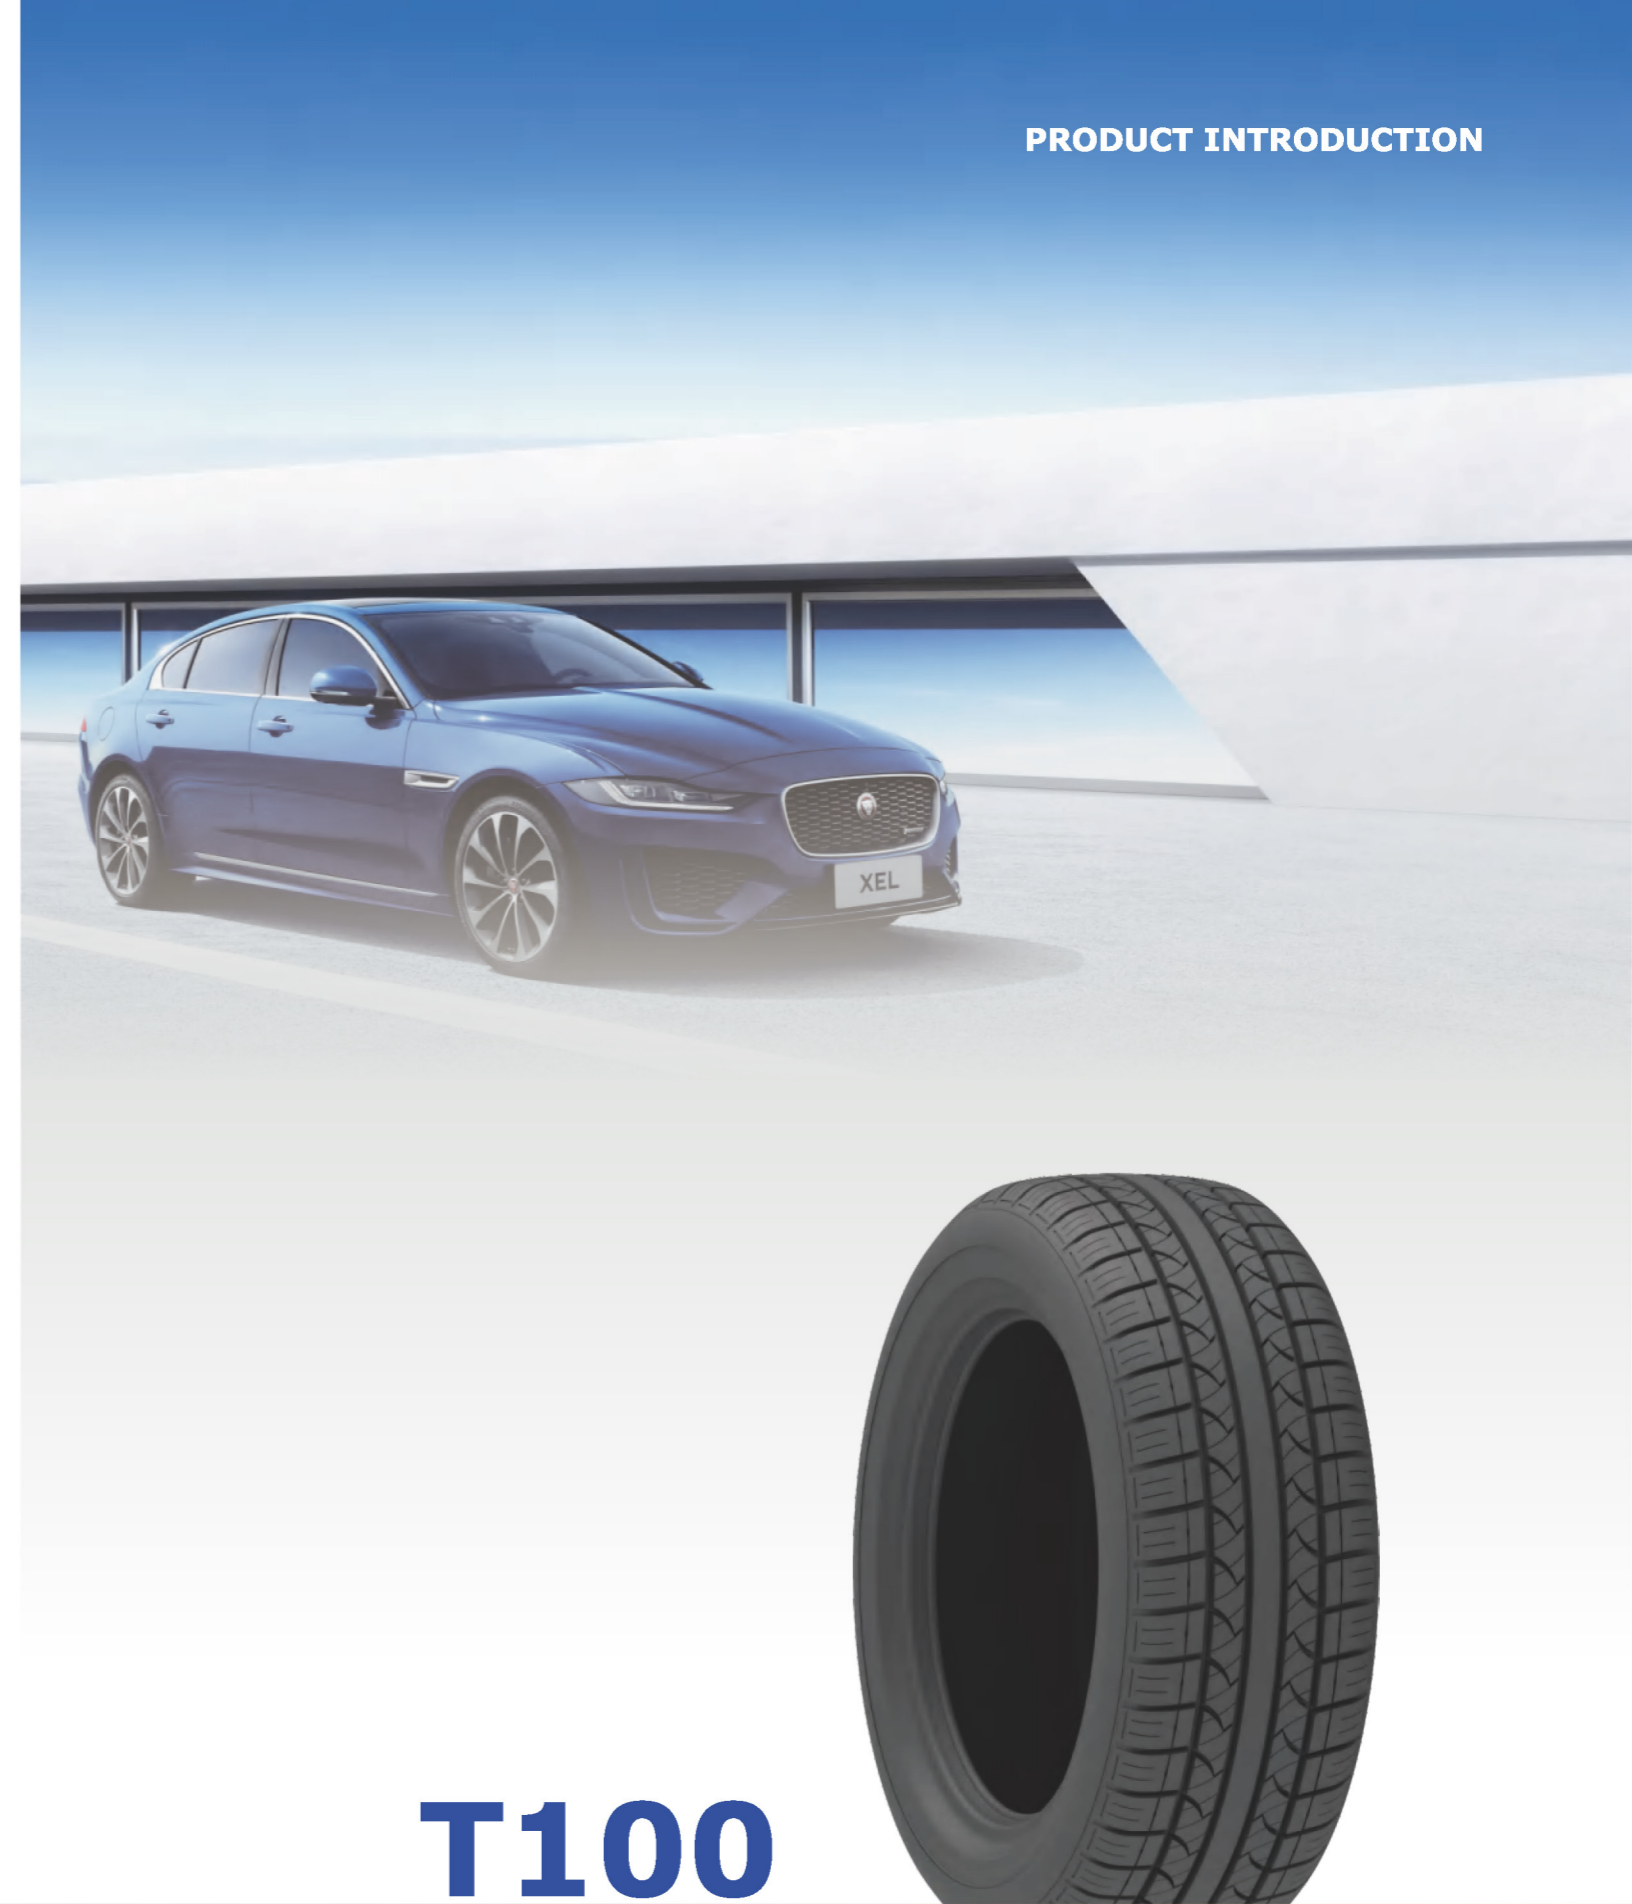

# T100

## TRANSFORCE 768

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WINTH (mm)	OVERALL DIAMETER (mm)	TREAD DEPTH (MM)	MAXLOAD KG LBS	MAX PRESSURE Kpa Psi
225/55ZR18	98	W	7J	233	705	8	750/1653	300/44
255/50ZR19	103	W	8J	265	739	8	875/1929	300/44
245/45ZR19	98	W	8J	243	703	7.4	750/1653	300/44
215/50R18	92	V	7J	226	673	7.4	630/1389	300/44
225/45ZR19	92	W	7½J	225	685	7.4	630/1389	300/44
225/50ZR18	95	W	7J	233	683	7.4	690/1521	300/44
255/35ZR19	92	W	9J	260	661	7.4	630/1389	300/44
255/45ZR18	99	W	8½J	255	687	7.4	775/1709	300/44
255/40ZR19	96	W	9J	260	687	7.4	710/1565	300/44
235/35ZR19	87	W	8½J	241	647	7.4	545/1201	300/44
275/40ZR20	102	W	9½J	278	728	7.4	850/1874	300/44
275/45ZR20	106	W	9J	273	756	7.4	950/2094	300/44
235/50R18	97	V	7½J	245	693	7.4	730/1609	300/44
245/40ZR19	94	W	8½J	248	679	7.4	670/1477	300/44
225/60R18	100	V	6½J	228	727	7.8	800/1764	300/44
235/50R19	99	W	7½J	245	719	7.8	775/1709	300/44
255/55ZR19	107	W	8½J	265	763	7.8	975/2149	300/44
235/55ZR20	102	W	7½J	245	766	7.8	850/1874	300/44
255/50ZR20	109XL	W	8J	265	764	7.8	1030/2271	300/44
255/55ZR20	110XL	W	8J	265	788	7.4	1060/2337	300/44
255/45ZR20	101	W	8½J	255	738	7.8	825/1819	300/44
275/45ZR19	104	W	9J	273	731	7.8	900/1984	300/44
275/40ZR19	101	W	9½J	278	703	7.8	825/1819	300/44
275/35ZR19	96	W	9½J	278	675	7.8	710/1565	300/44
265/50ZR19	106	W	8½J	277	749	7.8	950/2094	300/44
255/45ZR19	100	W	8½J	255	713	7.8	800/1764	300/44
235/45ZR19	95	W	8J	236	695	7.8	690/1521	300/44
235/40ZR19	92	W	8½J	241	671	7.8	630/1389	300/44
255/40R18	95	W	9J	260	661	7.4	690/1521	300/44
245/50ZR18	100	W	7½J	253	703	7.4	800/1764	300/44



## TRANSFORCE 168

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WINTH (mm)	OVERALL DIAMETER (mm)	TREAD DEPTH (MM)	MAXLOAD KG LBS	MAX PRESSURE Kpa Psi
205/60R16	92	H	6J	209	652	7.2	630/1389	300/44
205/55R16	91	V	6½J	214	632	7.2	615/1356	300/44
215/60R16	95	H	6½J	221	664	7.2	690/1521	300/44
195/65R15	91	V	6J	201	635	7.2	615/1356	300/44
175/70R14	84	H	5.00B	177	602	7.2	500/1102	300/44
205/50R17	87	V	6½J	214	638	7	580/1279	300/44
215/50R17	91	W	7J	226	648	7	615/1356	300/44
185/70R14	88	T	5½J	189	616	7	560/1235	300/44



**T168**

## TRANSFORCE 568

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WINTH (mm)	OVERALL DIAMETER (mm)	TREAD DEPTH (MM)	MAXLOAD KG LBS	MAX PRESSURE Kpa Psi
235/60R18	107XL	H	7J	240	739	9	975/2149	340/50
215/70R16	100	T	6 ½J	221	708	7.8	800/1764	300/44
225/70R16	103	T	6 ½J	228	722	7.8	875/1929	300/44
215/60R17	96	H	6 ½J	221	690	7.8	710/1565	300/44
225/60R17	99	V	6 ½J	228	702	7.8	775/1709	300/44
225/65R17	102	V	6 ½J	228	724	7.8	850/1874	300/44
235/65R17	108XL	H	7J	240	738	7.8	1000/2205	340/50
265/65R17	112	H	8J	272	776	7.8	1120/2469	300/44
215/55R18	95	V	7J	226	693	7.8	690/1521	300/44
235/55R18	100	V	7 ½J	245	715	7.8	800/1764	300/44
235/65R18	106	H	7J	240	763	7.8	950/2094	300/44
225/55R19	99	V	7J	233	731	7.8	775/1709	300/44
235/55R19	105XL	V	7 ½J	245	741	7.8	925/2039	340/50
245/55ZR19	103	W	7 ½J	253	753	7.8	875/1929	300/44



**T568**

## CRADec GC688

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WINTH (mm)	OVERALL DIAMETER (mm)	TREAD DEPTH (MM)	MAXLOAD KG LBS	MAX PRESSURE Kpa Psi
215/75R15	100	S	6J	216	703	9	800/1764	350/50
LT235/75R15	110/107	S	6½J	235	733	9	1060/2335	450/65
235/70R16	106	T	7J	240	736	9	950/2094	350/51
245/70R16	111XL	T	7J	248	750	9	1090/2403	340/50
265/70R16	112	T	8J	272	778	9	1120/2469	350/51
265/65R17	112	H	8J	272	776	9	1120/2469	300/44



## LIBERUD GL267

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WINTH (mm)
175/70R14C	95/93	S	5J	177

OVERALL DIAMETER (mm)	TREAD DEPTH (MM)	MAXLOAD KG LBS	MAX PRESSURE Kpa Psi
602	9	690/1521	375/54



## LIBERUD GL268

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WINTH (mm)
165R13C	94/93	R	4.50B	165
185R14C	102/100	Q	5½J	189
185R15C	103/102	Q	5½J	189
195/70R15C	104/102	Q	6J	201
195R15C	106/104	R	5½J	196

OVERALL DIAMETER (mm)	TREAD DEPTH (MM)	MAXLOAD KG LBS	MAX PRESSURE Kpa Psi
594	9	670/1477	450/65
652	9	850/1875	450/65
677	9	875/1930	450/65
655	9	900/1984	450/65
693	9	950/2094	450/65

